


STARLINE LINEAR






*Images for reference only

Features:

- Flexible and convenient installation, Minor modifications to the walls.
- High quality material, Zinc alloy+stainless steel composition, Strong and durable not easy to deformation.
- Fixed rod can be adjusted by 45°, More possibilities, Suitable for direct, Indirect lighting, Wall washing lighting and other applications.
- Steel strip can up to 25m, Which can perefectly adapt to the lighting decoration of large space.





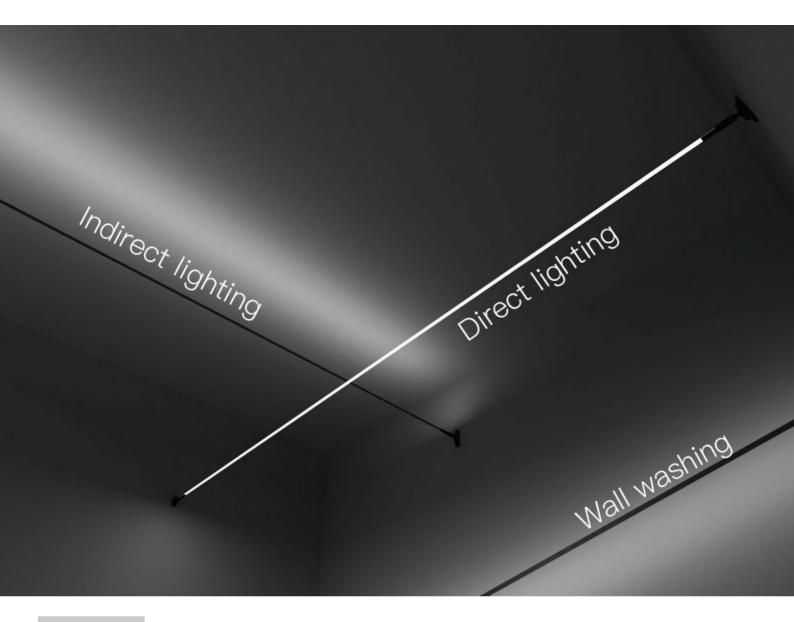

Accessories:



Screw Shaft / Cardan Shaft



Cardan Shaft Base




Steel Band 25 Meters / Roll




Power Supply PCB


Size:

Screw Shaft / Cardan Shaft



Cardan Shaft Base



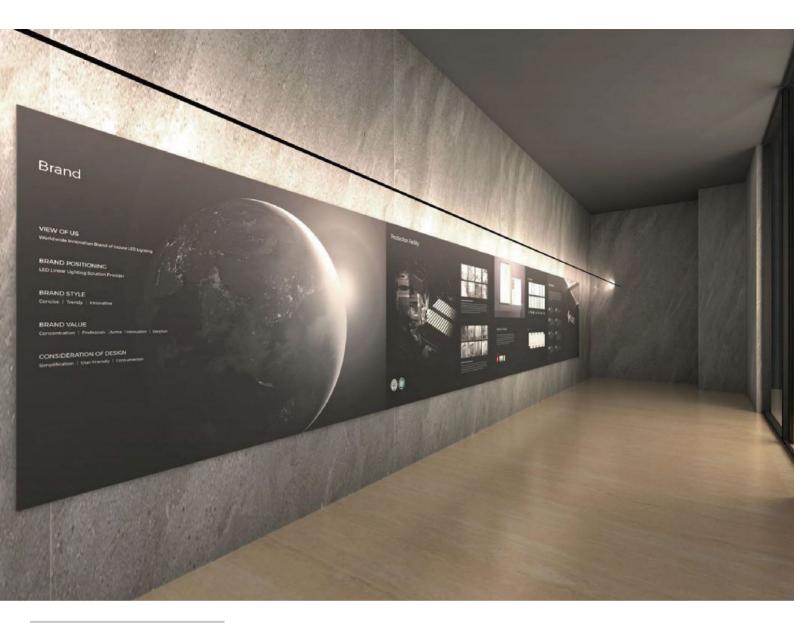


Recommended Light Strip:

SKU: BL2414



Led COB 14W/M 120LM/W

SKU: BL2429



Led 30W/M 140LM/W 4200LM/M

SKU: BL24109




Led 10 Mt. 12W/M 2000 LM/M

Colour:



Black

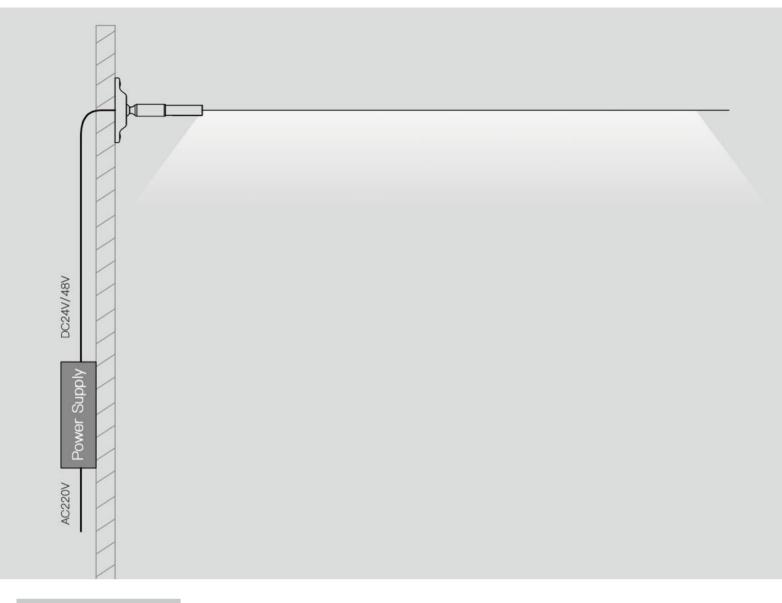

Connection Diagram:



Step 1
Box with Fixing Kit



Step 2
Drill the holes at the exit of the wall first.



Insert screw shaft into the base



Step 4
Connect the power supply for the led strip



Step 5
Fix the base to the wall with screws



Step 6
Fix the led strip to the steel belt.



Step 7
Connect the screw to the steel belt with screws.



Step 8
First screw into the connect without power supply.



Step 9
When connected with one end of the power supply, Hold the screw and twist one end



Step 10

Plug the led strip connector into the female base connector, Take out the screw and fix it on the drilled wall. Repeat the operation on the other end.