

Portable Power Station



Intelligent monitoring

Real-time monitoring of product performance.



Short-circuit protection

Auto-cut circuit when short occurs.



Overcharge protection

Prevent battery from overcharging and auto-stop when fully charged.



Overpower protection

Product has dynamic power protection which will auto-stop output when overpower occurs.



Battery balance system

Extend the service life of batteries and ensure the consistency of batteries.



Temperature protection

Guarantee battery working at safe temperature.



Over-current protection

Auto-cut circuit when overcurrent occurs.



Over-voltage protection

Protect product from high or low voltage harm to ensure product and facilities safe.



LISTING DETAILS

Model No: VT-2002
 SKU Code: 11445
 EAN Code: 3800157692250

MASTER BOX PACKAGING

Qty Per Pallet: 1
 Net Weight : 25KG
 Product Size : 470*367*292 mm



Drone



Blender



Mini Cooler



Mobile



Laptop



TV



Fan



Printer




Power Tools



Portable Power Station

DRAWING AND DIMENSION

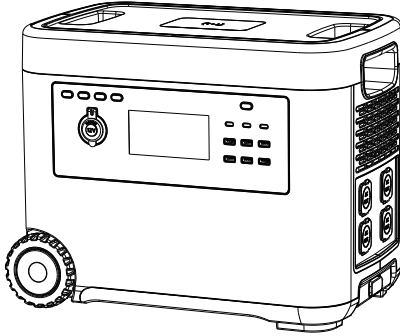

Provide safe, easy, clean and green energy for you

Our product can be used as an indoor backup power source as well as an outdoor solar generator. High capacity lithium cell and high power output circuit provide sufficient power supplies for illumination, electrical appliances and tools etc.

Inlaid high quality lithium cell

Our product use high quality lithium cell. Which has high capacity density and super long cycle life.



Safe and intelligent

Our product use integration design and intelligent control, With inlaid safe and reliable BMS system and intelligent output control. Our product is safe and stable with reliable circuit designs like real time temperature monitoring, over temperature protection, overcurrent protection and short-circuit protection etc.

High-efficiency Solar Generating Technology

Our product use MPPT (Maximum Power Point Tracking) technology, which can match wider solar charging board, so as to maximize the solar charging efficiency.

Battery Pack :	93.8Ah /44.8V 2016Wh
Ac Rated Output :	2000W
AC Input :	1600W
Solar Charge :	DC26V-40V Max 700W solar panel
AC Output:	220V-5.4A 50Hz/2200W- peak Value 4000W
Car Charge Output :	13.5V 9A (max 100W)
USB-A Output :	5v 2.4A
QC Output :	5V/9V/12V/18W
USB-C Output : 5	5V 3A/9V 3A/12V 3A/15V 3A/20V3.25A PD65W
Wireless Charging Output:	15W
Cycle Life :	Cycled > 2000 LiFePO4 Battery



LED High-brightness Display Screen



Solar energy Charging
Maximum power point tracking



80% charge in 1 hour



Wide Voltage Input
AC 100-240V 50/60Hz input



SOLD IN OVER
70 COUNTRIES

www.vtacexports.com
ONE BRAND, ENDLESS SOLUTIONS.